

More than 80 years

providing Protection solutions

From its inception, in 1923, the Terasaki group has been intrinsically linked with the development and production of protection equipment. This has led to the group establishing itself as a world class leader in protection technology, pioneering in:

- Development of the worlds first Current Limiting Circuit Breaker
- Development of the worlds first Electronic Moulded Case Circuit Breakers

We are one of only three global manufacturers with its own technology in:

- ACBs
- MCCBs
- DIN MCBs
- NEMA MCBs



technology applied to protection

Based in Granollers, Barcelona, our Centre Of Excellence Terasaki España S.A.U., manufacture a complete range of DIN modular products which are distributed world wide. From our completely modernised manufacturing facility in Barcelona,

our state of the art production line allows for an almost 100% automated manufacturing process. This flexibility in production technology allows us to accommodate the production of up to 12 MCB types simultaneously.



circuit protection



MCBs

4kA

1P+N, 2P
C - 3A-40A
Standard: IEC 60 898

10kA

1P, 2P, 3P, 4P
B, C and D - 0,3A-63A
Standard: IEC 60 898

10kA (In 80-100-125A)

1P, 1P+N, 2P, 3P, 3P+N, 4P
C
Standards: IEC 60 898, IEC 60 947-2

6kA

1P, 1P+N, 2P, 3P, 3P+N, 4P
1P+N in 1 module
B, C and D - 0,3A-63A
Standard: IEC 60 898

15kA

1P, 2P, 3P, 4P
B, C and D - 0,3A-63A
Standard: IEC 60 947-2

25kA

1P, 2P, 3P, 4P
B, C and D - 1-63A
Standard: IEC 60 947-2

Shunt, UVT and auxiliary contacts are common for both MCBs and RCCBs




IP20 protection

Combined auxiliary and alarm switch available

Contact position indicator

earth leakage protection

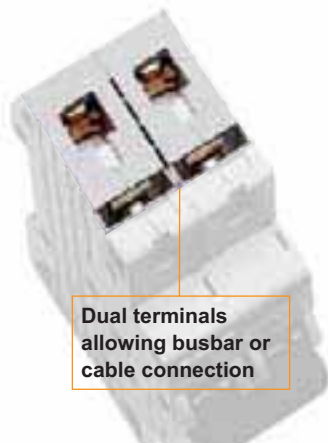

Dual terminals allowing busbar or cable connection

Accessories:
Shunt trip
Under voltage trip
Auxiliary contacts



RCBOs

2 mod. (1P+N)
6 - 40A
30 and 300mA
6 kA, types AC and A
B and C
Standard: IEC 61009

Single Module RCBO + Neutral Tail (1P+N)

6 - 32A
30mA
10kA, type A
B and C
Standard: BS EN 61009-1




RCDs

2 and 4 mod.
2P=16, 25, 40, 63, 80 and 100A
4P= 25, 40, 63, 80 and 100A
10, 30 and 300 mA
Types AC, A and A-S
Standard: IEC 61008

TemDin

innovation



• Integrated quality control for all components throughout the production process




• All contacts throughout the TemDin range are silver plated, providing excellent electrical and mechanical endurance


• Trip indication / true contact status



• Efficient and effective production technology utilising KANBAN material management system



• Maximum arc extinction from power arc chutes throughout the range



control



Switch disconnectors

1NO, 2NO, 3NO and 4NO
1 module

20A

Changeover switches

With 1-0-2 or without 1-2 intermediate position
1 and 2 pole

Push buttons

20A
Single or double push button + pilot neon lamp
green/red/clear

Impulse switches

2 pole - 16A and 32A
With additional pole blocks to
make up 3 or 4 pole arrangements

Contactors

Normal version and special type
available with
3-position handle
2 pole - 25A and 32A
With additional pole blocks to
make up 3 or 4 pole arrangements
4pole compact contactor
4 NO - 25A, 40A and 63A



Mains disconnect switches

32, 63 and 100A
1, 2, 3 and 4 pole

measurement

Universal digital analyser

4 module device with 3 selectors,
monitoring of up to 24 electrical
parameters: line voltage, phase
effective values, power factor, instant
active and reactive power, KWh/KVarh
consumption and KWh/KVarh energy
meter

Active energy meter

With indication LEDs: red
for load consumption and
green for supply input



Analogue Ammeters and Voltmeters

3 module

Digital Voltmeter/Ammeter

One instrument for either current or voltage
measurement

Frequency meter

Automatic selection of decimal point position
Measurement range from 4 to 1000Hz

Digital wattmeter

Automatic selection of decimal
point position up to 999kW

Current Transformers

Primary current conversion -max. 1000A- to 5A
secondary for analogue and digital measurement
devices



command

Light sensitive switch

Easy to use timer. Adjustable setting 2 – 10,000 Lux. ON and OFF time delay facility for occasional drops in light intensity

Digital time switches - Auto/hour

1 and 2 channels

Automatic summer/winter time change



Time relay

5 timing functions. Stair lighting timed management or permanent function allowing the timed control of lights, small motors, pumps or fans



Staircase lighting time switch

3 and 4 wire connection
3 positions changeover: time switch, OFF and permanent light
Timing adjustment from 30 sec. to 15 min.
Recycling option

Week digital time switch In 1 module

Easy to programme buttons with clear display, the single module time switch can be programmed for up to 672 steps within a 7 day period

Analogue time switches

Simple control of electrical circuits by manual adjustment of the setting dial

signalling devices

Pilot lamps

Neon lamps, 3 colours: green, red and clear
Double pilot: red and green

Bell/Buzzer

Changeover bell or buzzer function
With IT 230/12V incorporated



special protection

Manual motor starters

Up to 25A at AC3

Wide range of accessories:

Auxiliary contact blocks, shunt trip, under voltage trip, Enclosures and padlocking and emergency devices

Surge arresters

Imax of 20, 45, 65 and 80kA

Plug-in single pole and multi-pole monoblock

All with or without voltage free signalling contact




Safety fuse holders

For cylindrical fuses of 20A, 25A, 50A and 100A

Light indicator lamp for 20A and 25A types

	Page:
Ratings and specifications.....	7
Technical information.....	41
Dimensions.....	81
Index.....	107

	Page:
1.- Domestic protection	
- Miniature circuit breakers	8
- Residual current circuit breakers	8
- Miniature circuit breakers DE	9
2.- Circuit protection	
- Miniature circuit breakers DS	10
- Miniature circuit breakers DH	12
- Miniature circuit breakers 80, 100 and 125A	14
- Miniature circuit breakers DS1	15
3.- People protection	
- Residual current circuit breakers with overcurrent protection ZDS and ZDH	16
- Residual current circuit breakers ZFI	17
- Residual current circuit breakers FI	18
4.- Add on devices and accessories	
- Add on devices	19
- Comb busbars and accessories	21
5.- Command and control	
- Contactors	22
- Impulse relays	25
- Pushbuttons, switches and changeovers switches	26
- Main disconnect switches	27
6.- Programming and measurement	
- Analogue time switches and single module digital time switch	28
- Digital time switches and light sensitive switch	29
- Staircase switches, pilots and Bell+buzzer+transformer	30
- Digital measurement instruments	31
- Analogue measurement instruments	32
- Current transformer	33
7.- Modular protection	
- Safety transformers	34
- Manual motor starters	35
- Fuse holder	37
- LS Surge arresters	38



Rated voltage	230V / 400V~ 240V / 415V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Terminal capacity	35 mm ²
Electrical endurance	30,000
Mechanical endurance	40,000
Poles	1p 1p+N 2p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)
Standards	EN-60898

- Technical details: page: 41
- Dimensions: page: 83



Miniature circuit breakers R

Nominal current ratings from 10 to 40A

Miniature circuit breakers designed for protection of electrical installations against overloads and short circuits.

Poles	In (A)	DIN mod.	Reference
1	10	1	C06N10010
1	16	1	C06N10016
1	20	1	C06N10020
1	25	1	C06N10025
1	32	1	C06N10032
1	40	1	C06N10040
1+ N	10	2	C06N11010
1+ N	16	2	C06N11016
1+ N	20	2	C06N11020
1+ N	25	2	C06N11025
1+ N	32	2	C06N11032
1+ N	40	2	C06N11040
2	10	2	C06N20010
2	16	2	C06N20016
2	20	2	C06N20020
2	25	2	C06N20025
2	32	2	C06N20032
2	40	2	C06N20040



	Serie FI	Serie FIE
Rated voltage	230V / 400V~	230V~
Frequency	50 / 60 Hz	
Rated current	25 and 40 A	
Rated residual current	30 mA	
Residual tripping characteristic	AC	
Tripping time	< 30 ms	
Terminal capacity	35 mm ²	
Poles	2p	
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)	
Standards	EN 20383-75 CEE27	EN 61008

- Technical details: page: 41
- Dimensions: page: 83



Residual current circuit breakers FI - FIE

Nominal current ratings from 25 to 40A

Residual current circuit breakers protect people against electrocution from direct or indirect contact. They also protect property from fires caused by the breakdown of insulation of conductors.

FIE series

Poles	In (A)	DIN mod.	Residual current Idn (mA)	Reference
2	25	2	30	FIE25/2/003
2	40	2	30	FIE40/2/003

FI series

Poles	In (A)	DIN mod.	Residual current Idn (mA)	Reference
2	25	4	30	FI25/2/003
2	40	4	30	FI40/2/003

Field fittable accessories



Short-circuit capacity
4.5kA (EN 60898)



Tripping characteristic
C



Application
Domestic distribution



Technical
Data

Rated voltage	230/400V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Terminal capacity	35 mm ²
Electrical endurance	30,000
Mechanical endurance	40,000
Poles	1p+N 2p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)
Standards	EN 60898, EN 60947-2 EN 20317

NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84



Nominal current ratings from 3 to 40A

The TemDin2 range of Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits.

Tripping curves

The TemDin 2 series of Miniature Circuit Breakers are manufactured in accordance with EN 60898 (tripping characteristics B, C and D)


- Curve C: magnetic trip threshold = 5 – 10 I_n

Poles	I _n (A)	DIN mod.	Type C
1+N	3	2	DE06C11003
1+N	6	2	DE06C11006
1+N	10	2	DE06C11010
1+N	16	2	DE06C11016
1+N	20	2	DE06C11020
1+N	25	2	DE06C11025
1+N	32	2	DE06C11032
1+N	40	2	DE06C11040
2	3	2	DE06C20003
2	6	2	DE06C20006
2	10	2	DE06C20010
2	16	2	DE06C20016
2	20	2	DE06C20020
2	25	2	DE06C20025
2	32	2	DE06C20032
2	40	2	DE06C20040

Field fittable accessories



Short-circuit capacity
6kA (EN 60898)



Tripping characteristic
B, C, D



Application
Domestic and commercial distribution



Technical Data

Rated voltage	230V / 400V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Terminal capacity	35 mm ²
Electrical endurance	30,000
Mechanical endurance	40,000
Poles	1p 1p+N 2p 3p 3p+N 4p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)
Standards	EN 60898, EN 60947-2 EN 20317

NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84



Nominal current ratings from 0.3 to 63A

The TemDin2 range of Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits.

Tripping curves

The TemDin 2 series of Miniature Circuit Breakers are manufactured in accordance with EN 60898 (tripping characteristics B, C and D)

- Curve B: magnetic trip threshold = 3 – 5 In
- Curve C: magnetic trip threshold = 5 – 10 In
- Curve D: magnetic trip threshold = 10 – 20In

Poles	In (A)	DIN mod.	B	Type C	D
1	0.3	1	-	-	DS06D100V3
1	0.5	1	-	-	DS06D100V5
1	0.75	1	-	-	DS06D100V7
1	1	1	-	-	DS06D10001
1	1.6	1	-	-	DS06D101V6
1	2	1	-	-	DS06D10002
1	2.5	1	-	-	DS06D102V5
1	3	1	-	-	DS06D10003
1	3.5	1	-	-	DS06D103V5
1	4	1	-	-	DS06D10004
1	6	1	DS06B10006	DS06C10006	DS06D10006
1	10	1	DS06B10010	DS06C10010	DS06D10010
1	16	1	DS06B10016	DS06C10016	DS06D10016
1	20	1	DS06B10020	DS06C10020	DS06D10020
1	25	1	DS06B10025	DS06C10025	DS06D10025
1	32	1	DS06B10032	DS06C10032	DS06D10032
1	40	1	DS06B10040	DS06C10040	DS06D10040
1	50	1	DS06B10050	DS06C10050	DS06D10050
1	63	1	DS06B10063	DS06C10063	DS06D10063
1+N	0.3	2	-	-	DS06D110V3
1+N	0.5	2	-	-	DS06D110V5
1+N	0.75	2	-	-	DS06D110V7
1+N	1	2	-	-	DS06D11001
1+N	1.6	2	-	-	DS06D111V6
1+N	2	2	-	-	DS06D11002
1+N	2.5	2	-	-	DS06D112V5
1+N	3	2	-	-	DS06D11003
1+N	3.5	2	-	-	DS06D113V5
1+N	4	2	-	-	DS06D11004
1+N	6	2	DS06B11006	DS06C11006	DS06D11006
1+N	10	2	DS06B11010	DS06C11010	DS06D11010
1+N	16	2	DS06B11016	DS06C11016	DS06D11016
1+N	20	2	DS06B11020	DS06C11020	DS06D11020
1+N	25	2	DS06B11025	DS06C11025	DS06D11025
1+N	32	2	DS06B11032	DS06C11032	DS06D11032
1+N	40	2	DS06B11040	DS06C11040	DS06D11040
1+N	50	2	DS06B11050	DS06C11050	DS06D11050
1+N	63	2	DS06B11063	DS06C11063	DS06D11063

Field fittable
accessories

Short-circuit capacity
6kA (EN 60898)



Tripping characteristic
B, C, D



Application
**Domestic and
commercial distribution**




Poles	In (A)	DIN mod.	B	Type C	D
2	0.3	2	-	-	DS06D200V3
2	0.5	2	-	-	DS06D200V5
2	0.75	2	-	-	DS06D200V7
2	1	2	-	-	DS06D20001
2	1.6	2	-	-	DS06D201V6
2	2	2	-	-	DS06D20002
2	2.5	2	-	-	DS06D202V5
2	3	2	-	-	DS06D20003
2	3.5	2	-	-	DS06D203V5
2	4	2	-	-	DS06D20004
2	6	2	DS06B20006	DS06C20006	DS06D20006
2	10	2	DS06B20010	DS06C20010	DS06D20010
2	16	2	DS06B20016	DS06C20016	DS06D20016
2	20	2	DS06B20020	DS06C20020	DS06D20020
2	25	2	DS06B20025	DS06C20025	DS06D20025
2	32	2	DS06B20032	DS06C20032	DS06D20032
2	40	2	DS06B20040	DS06C20040	DS06D20040
2	50	2	DS06B20050	DS06C20050	DS06D20050
2	63	2	DS06B20063	DS06C20063	DS06D20063
3	0.3	3	-	-	DS06D300V3
3	0.5	3	-	-	DS06D300V5
3	0.75	3	-	-	DS06D300V7
3	1	3	-	-	DS06D30001
3	1.6	3	-	-	DS06D301V6
3	2	3	-	-	DS06D30002
3	2.5	3	-	-	DS06D302V5
3	3	3	-	-	DS06D30003
3	3.5	3	-	-	DS06D303V5
3	4	3	-	-	DS06D30004
3	6	3	DS06B30006	DS06C30006	DS06D30006
3	10	3	DS06B30010	DS06C30010	DS06D30010
3	16	3	DS06B30016	DS06C30016	DS06D30016
3	20	3	DS06B30020	DS06C30020	DS06D30020
3	25	3	DS06B30025	DS06C30025	DS06D30025
3	32	3	DS06B30032	DS06C30032	DS06D30032
3	40	3	DS06B30040	DS06C30040	DS06D30040
3	50	3	DS06B30050	DS06C30050	DS06D30050
3	63	3	DS06B30063	DS06C30063	DS06D30063
3+N	0.3	4	-	-	DS06D310V3
3+N	0.5	4	-	-	DS06D310V5
3+N	0.75	4	-	-	DS06D310V7
3+N	1	4	-	-	DS06D31001
3+N	1.6	4	-	-	DS06D311V6
3+N	2	4	-	-	DS06D31002
3+N	2.5	4	-	-	DS06D312V5
3+N	3	4	-	-	DS06D31003
3+N	3.5	4	-	-	DS06D313V5
3+N	4	4	-	-	DS06D31004
3+N	6	4	DS06B31006	DS06C31006	DS06D31006
3+N	10	4	DS06B31010	DS06C31010	DS06D31010
3+N	16	4	DS06B31016	DS06C31016	DS06D31016
3+N	20	4	DS06B31020	DS06C31020	DS06D31020
3+N	25	4	DS06B31025	DS06C31025	DS06D31025
3+N	32	4	DS06B31032	DS06C31032	DS06D31032
3+N	40	4	DS06B31040	DS06C31040	DS06D31040
3+N	50	4	DS06B31050	DS06C31050	DS06D31050
3+N	63	4	DS06B31063	DS06C31063	DS06D31063
4	0.3	4	-	-	DS06D400V3
4	0.5	4	-	-	DS06D400V5
4	0.75	4	-	-	DS06D400V7
4	1	4	-	-	DS06D40001
4	1.6	4	-	-	DS06D401V6
4	2	4	-	-	DS06D40002
4	2.5	4	-	-	DS06D402V5
4	3	4	-	-	DS06D40003
4	3.5	4	-	-	DS06D403V5
4	4	4	-	-	DS06D40004
4	6	4	DS06B40006	DS06C40006	DS06D40006
4	10	4	DS06B40010	DS06C40010	DS06D40010
4	16	4	DS06B40016	DS06C40016	DS06D40016
4	20	4	DS06B40020	DS06C40020	DS06D40020
4	25	4	DS06B40025	DS06C40025	DS06D40025
4	32	4	DS06B40032	DS06C40032	DS06D40032
4	40	4	DS06B40040	DS06C40040	DS06D40040
4	50	4	DS06B40050	DS06C40050	DS06D40050
4	63	4	DS06B40063	DS06C40063	DS06D40063

Field fittable accessories



Short-circuit capacity
10kA (EN 60898)



Tripping characteristic
B, C, D



Application
**Industrial and
commercial distribution**



Technical
Data

Rated voltage	230V / 400V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Terminal capacity	35 mm ²
Electrical endurance	30,000
Mechanical endurance	40,000
Poles	1p 1p+N 2p 3p 3p+N 4p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)
Standards	EN 60898, EN 60947-2 EN 20317

NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84



Nominal current ratings from 3 to 63A

The TemDin2 range of Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits.

Tripping curves

The TemDin 2 series of Miniature Circuit Breakers are manufactured in accordance with EN 60898 (tripping characteristics B, C and D)

- Curve B: magnetic trip threshold = 3 – 5 In
- Curve C: magnetic trip threshold = 5 – 10 In
- Curve D: magnetic trip threshold = 10 – 20In

Poles	In (A)	DIN mod.	B	Type C	D
1	0.3	1	-	-	DH06D100V3
1	0.5	1	-	-	DH06D100V5
1	0.75	1	-	-	DH06D100V7
1	1	1	-	-	DH06D10001
1	1.6	1	-	-	DH06D101V6
1	2	1	-	-	DH06D10002
1	2.5	1	-	-	DH06D102V5
1	3	1	-	-	DH06D10003
1	3.5	1	-	-	DH06D103V5
1	4	1	-	-	DH06D10004
1	6	1	DH06B10006	DH06C10006	DH06D10006
1	10	1	DH06B10010	DH06C10010	DH06D10010
1	16	1	DH06B10016	DH06C10016	DH06D10016
1	20	1	DH06B10020	DH06C10020	DH06D10020
1	25	1	DH06B10025	DH06C10025	DH06D10025
1	32	1	DH06B10032	DH06C10032	DH06D10032
1	40	1	DH06B10040	DH06C10040	DH06D10040
1	50	1	DH06B10050	DH06C10050	DH06D10050
1	63	1	DH06B10063	DH06C10063	DH06D10063
1+N	0.3	2	-	-	DH06D110V3
1+N	0.5	2	-	-	DH06D110V5
1+N	0.75	2	-	-	DH06D110V7
1+N	1	2	-	-	DH06D11001
1+N	1.6	2	-	-	DH06D111V6
1+N	2	2	-	-	DH06D11002
1+N	2.5	2	-	-	DH06D112V5
1+N	3	2	-	-	DH06D11003
1+N	3.5	2	-	-	DH06D113V5
1+N	4	2	-	-	DH06D11004
1+N	6	2	DH06B11006	DH06C11006	DH06D11006
1+N	10	2	DH06B11010	DH06C11010	DH06D11010
1+N	16	2	DH06B11016	DH06C11016	DH06D11016
1+N	20	2	DH06B11020	DH06C11020	DH06D11020
1+N	25	2	DH06B11025	DH06C11025	DH06D11025
1+N	32	2	DH06B11032	DH06C11032	DH06D11032
1+N	40	2	DH06B11040	DH06C11040	DH06D11040
1+N	50	2	DH06B11050	DH06C11050	DH06D11050
1+N	63	2	DH06B11063	DH06C11063	DH06D11063

Field fittable accessories



Short-circuit capacity
10kA (EN 60898)



Tripping characteristic
B, C, D



Application
Industrial and commercial distribution



Poles	In (A)	DIN mod.	B	Type C	D
2	0.3	2	-	-	DH06D200V3
2	0.5	2	-	-	DH06D200V5
2	0.75	2	-	-	DH06D200V7
2	1	2	-	-	DH06D20001
2	1.6	2	-	-	DH06D201V6
2	2	2	-	-	DH06D20002
2	2.5	2	-	-	DH06D202V5
2	3	2	-	-	DH06D20003
2	3.5	2	-	-	DH06D203V5
2	4	2	-	-	DH06D20004
2	6	2	DH06B20006	DH06C20006	DH06D20006
2	10	2	DH06B20010	DH06C20010	DH06D20010
2	16	2	DH06B20016	DH06C20016	DH06D20016
2	20	2	DH06B20020	DH06C20020	DH06D20020
2	25	2	DH06B20025	DH06C20025	DH06D20025
2	32	2	DH06B20032	DH06C20032	DH06D20032
2	40	2	DH06B20040	DH06C20040	DH06D20040
2	50	2	DH06B20050	DH06C20050	DH06D20050
2	63	2	DH06B20063	DH06C20063	DH06D20063
3	0.3	3	-	-	DH06D300V3
3	0.5	3	-	-	DH06D300V5
3	0.75	3	-	-	DH06D300V7
3	1	3	-	-	DH06D30001
3	1.6	3	-	-	DH06D301V6
3	2	3	-	-	DH06D30002
3	2.5	3	-	-	DH06D302V5
3	3	3	-	-	DH06D30003
3	3.5	3	-	-	DH06D303V5
3	4	3	-	-	DH06D30004
3	6	3	DH06B30006	DH06C30006	DH06D30006
3	10	3	DH06B30010	DH06C30010	DH06D30010
3	16	3	DH06B30016	DH06C30016	DH06D30016
3	20	3	DH06B30020	DH06C30020	DH06D30020
3	25	3	DH06B30025	DH06C30025	DH06D30025
3	32	3	DH06B30032	DH06C30032	DH06D30032
3	40	3	DH06B30040	DH06C30040	DH06D30040
3	50	3	DH06B30050	DH06C30050	DH06D30050
3	63	3	DH06B30063	DH06C30063	DH06D30063
3+N	0.3	4	-	-	DH06D310V3
3+N	0.5	4	-	-	DH06D310V5
3+N	0.75	4	-	-	DH06D310V7
3+N	1	4	-	-	DH06D31001
3+N	1.6	4	-	-	DH06D311V6
3+N	2	4	-	-	DH06D31002
3+N	2.5	4	-	-	DH06D312V5
3+N	3	4	-	-	DH06D31003
3+N	3.5	4	-	-	DH06D313V5
3+N	4	4	-	-	DH06D31004
3+N	6	4	DH06B31006	DH06C31006	DH06D31006
3+N	10	4	DH06B31010	DH06C31010	DH06D31010
3+N	16	4	DH06B31016	DH06C31016	DH06D31016
3+N	20	4	DH06B31020	DH06C31020	DH06D31020
3+N	25	4	DH06B31025	DH06C31025	DH06D31025
3+N	32	4	DH06B31032	DH06C31032	DH06D31032
3+N	40	4	DH06B31040	DH06C31040	DH06D31040
3+N	50	4	DH06B31050	DH06C31050	DH06D31050
3+N	63	4	DH06B31063	DH06C31063	DH06D31063
4	0.3	4	-	-	DH06D400V3
4	0.5	4	-	-	DH06D400V5
4	0.75	4	-	-	DH06D400V7
4	1	4	-	-	DH06D40001
4	1.6	4	-	-	DH06D401V6
4	2	4	-	-	DH06D40002
4	2.5	4	-	-	DH06D402V5
4	3	4	-	-	DH06D40003
4	3.5	4	-	-	DH06D403V5
4	4	4	-	-	DH06D40004
4	6	4	DH06B40006	DH06C40006	DH06D40006
4	10	4	DH06B40010	DH06C40010	DH06D40010
4	16	4	DH06B40016	DH06C40016	DH06D40016
4	20	4	DH06B40020	DH06C40020	DH06D40020
4	25	4	DH06B40025	DH06C40025	DH06D40025
4	32	4	DH06B40032	DH06C40032	DH06D40032
4	40	4	DH06B40040	DH06C40040	DH06D40040
4	50	4	DH06B40050	DH06C40050	DH06D40050
4	63	4	DH06B40063	DH06C40063	DH06D40063

Field fittable accessories



Short-circuit capacity
10kA (EN 60947-2)



Application
Industrial and commercial distribution



Technical
Data



Rated voltage	1pole	230V / 240V~
	2, 3 and 4 poles	400V / 415V~
Frequency	50 / 60 Hz	
Rated insulation voltage	440 V~	
Calibration temperature	40°C	
Terminal capacity	70 mm ²	
Electrical endurance	10,000	
Mechanical endurance	10,000	
Poles	1p	2p 3p 4p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)	
Standards	EN 60947-2	


NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84

Field fittable accessories



Short-circuit capacity
10kA (EN 60898)



Tripping characteristic
C



Application
Industrial and commercial distribution



Technical
Data



Rated voltage	230V / 400V~			
Frequency	50 / 60 Hz			
Rated insulation voltage	500 V			
Calibration temperature	30°C			
Terminal capacity	50 mm ²			
Electrical endurance	20,000			
Mechanical endurance	20,000			
Poles	1p	2p	3p	4p
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)			
Standards	EN 60898, EN 60947-2			

NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84

Miniature Circuit Breakers TH

Nominal current ratings from 80 to 125A

The TH range of Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits.

Tripping curves

The TH series of Miniature Circuit Breakers are manufactured in accordance with EN 60947-2.

- Curve B: magnetic trip threshold = 3.2 – 4.8 I_n
- Curve C: magnetic trip threshold = 6 - 9 I_n
- Curve D: magnetic trip threshold = 10 – 15 I_n

Poles	I _n (A)	DIN mod.	B	Trip C	D
1	80A	1.5	THB10 I 80	THC10 I 80	THD10 I 80
1	100A	1.5	THB10 I 100	THC10 I 100	THD10 I 100
1	125A	1.5	THB10 I 125	THC10 I 125	THD10 I 125
2	80A	3	THB10 II 80	THC10 II 80	THD10 II 80
2	100A	3	THB10 II 100	THC10 II 100	THD10 II 100
2	125A	3	THB10 II 125	THC10 II 125	THD10 II 125
3	80A	4.5	THB10 III 80	THC10 III 80	THD10 III 80
3	100A	4.5	THB10 III 100	THC10 III 100	THD10 III 100
3	125A	4.5	THB10 III 125	THC10 III 125	THD10 III 125
4	80A	6	THB10 IIII 80	THC10 IIII 80	THD10 IIII 80
4	100A	6	THB10 IIII 100	THC10 IIII 100	THD10 IIII 100
4	125A	6	THB10 IIII 125	THC10 IIII 125	THD10 IIII 125

Miniature Circuit Breakers DH125(*)

Nominal current ratings from 80 to 125A

The TemDin2 range of Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits.

Poles	I _n (A)	DIN mod.	Reference
1	80A	1.5	DH12C10080
1	100A	1.5	DH12C10100
1	125A	1.5	DH12C10125
2	80A	3	DH12C20080
2	100A	3	DH12C20100
2	125A	3	DH12C20125
3	80A	4.5	DH12C30080
3	100A	4.5	DH12C30100
3	125A	4.5	DH12C30125
4	80A	6	DH12C40080
4	100A	6	DH12C40100
4	125A	6	DH12C40125

(*) Available soon

1+N (1 mod.)
Field fittable accessories



Short-circuit capacity
6kA (EN 60898)



Tripping characteristic
B, C



Application
Domestic and commercial distribution



Technical
Data

Rated voltage	230V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Terminal capacity	16 mm ² flexible / 25 mm ² rigid
Electrical endurance	30,000
Mechanical endurance	40,000
Poles	1p+N
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)
Standards	EN 60898

NOTE: Suitable for use at 240/415V.

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 84



Nominal current ratings from 6 to 40A

This series has been designed for protection and control of electrical installations against overload and short circuits within domestic and commercial distribution applications with the advantage of saving space and cost.


Tripping curves

The TemDin 2 series of Miniature Circuit Breakers are manufactured in accordance with EN 60898 (tripping characteristics B, C and D)

- Curve B: magnetic trip threshold = 3 – 5 In
- Curve C: magnetic trip threshold = 5 – 10 In

Poles	In (A)	DIN mod.	Type	
			B	C
1	6	1	DS041NC006	DS041NB006
1	10	1	DS041NC010	DS041NB010
1	16	1	DS041NC016	DS041NB016
1	20	1	DS041NC020	DS041NB020
1	25	1	DS041NC025	DS041NB025
1	32	1	DS041NC032	DS041NB032
1	40	1	DS041NC040	DS041NB040

Field fittable accessories

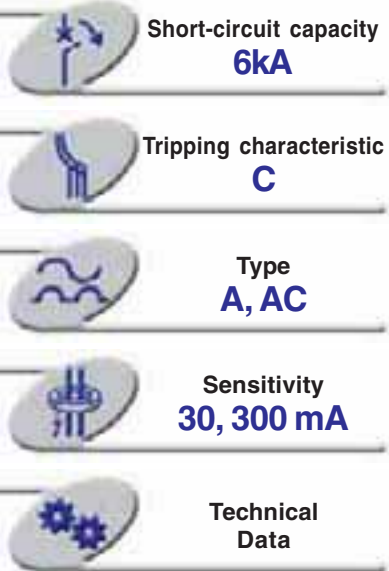

Rated voltage	230V / 240V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Tripping curve	C
Sensitivity	30 and 300 mA
Type	A and AC
Terminal capacity	25 mm ² flexible / 35 mm ² rigid
Electrical endurance	20,000
Mechanical endurance	20,000
Standards	EN 61009

- Accessories: page: 19
- Technical details: page: 41
- Dimensions: page: 85



ZDS RCBO

Nominal current ratings from 6 to 40A

Residual current circuit breakers with overcurrent protection designed for total safety.

- Residual current circuit breakers protect people against electrocution from direct or indirect contact (30mA). They also protect property from fires caused by the breakdown of insulation of conductors (300mA)
- ZDS RCBOs also protect circuits against overloads and short circuits

The device has a residual current trip indicator.

Type AC


Protection against sinusoidal leakage current. Applied in domestic and commercial installations.

Type A

Protection against sinusoidal and rectified leakage currents with or without a DC component. Applied in commercial and industrial installations.

Poles	In (A)	DIN mod.	Sensitivity mA	Type	Reference
2	6	2	30	AC	ZDS046/2/003-AC
2	10	2	30	AC	ZDS0410/2/003-AC
2	16	2	30	AC	ZDS0416/2/003-AC
2	20	2	30	AC	ZDS0420/2/003-AC
2	25	2	30	AC	ZDS0425/2/003-AC
2	32	2	30	AC	ZDS0432/2/003-AC
2	40	2	30	AC	ZDS0440/2/003-AC
2	6	2	300	AC	ZDS046/2/03-AC
2	10	2	300	AC	ZDS0410/2/03-AC
2	16	2	300	AC	ZDS0416/2/03-AC
2	20	2	300	AC	ZDS0420/2/03-AC
2	25	2	300	AC	ZDS0425/2/03-AC
2	32	2	300	AC	ZDS0432/2/03-AC
2	40	2	300	AC	ZDS0440/2/03-AC
2	6	2	30	A	ZDS046/2/003-A
2	10	2	30	A	ZDS0410/2/003-A
2	16	2	30	A	ZDS0416/2/003-A
2	20	2	30	A	ZDS0420/2/003-A
2	25	2	30	A	ZDS0425/2/003-A
2	32	2	30	A	ZDS0432/2/003-A
2	40	2	30	A	ZDS0440/2/003-A
2	6	2	300	A	ZDS046/2/03-A
2	10	2	300	A	ZDS0410/2/03-A
2	16	2	300	A	ZDS0416/2/03-A
2	20	2	300	A	ZDS0420/2/03-A
2	25	2	300	A	ZDS0425/2/03-A
2	32	2	300	A	ZDS0432/2/03-A
2	40	2	300	A	ZDS0440/2/03-A

*Type A and curve B available soon.

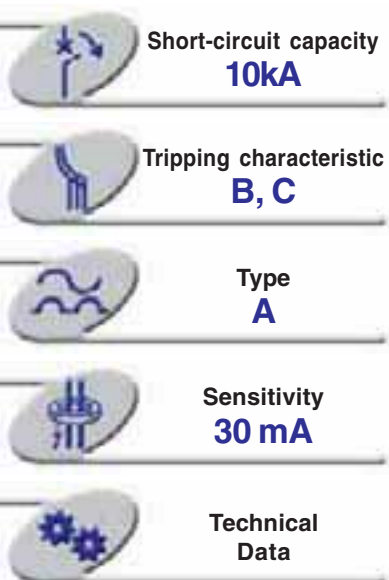

Rated voltage	230V / 240V~
Frequency	50 / 60 Hz
Calibration temperature	30°C
Tripping curve	B, C
Sensitivity	30 mA
Type	A
Terminal capacity	Incoming 25 mm ² / Outcoming 10 mm ²
Standards	EN 61009-1

- Technical details: page: 41
- Dimensions: page: 85



ZDH RCBO (single module RCBO + neutral tail)


Nominal current ratings from 6 to 32A

Residual current circuit breakers with overcurrent protection designed for total safety.

- Residual current circuit breakers protect people against electrocution from direct or indirect contact (30mA). They also protect property from fires caused by the breakdown of insulation of conductors.
- ZDH RCBOs also protect circuits against overloads and short circuits

In (A)	DIN mod.	Sensitivity mA	Type	Trip curve	
				B	C
6	1	30	A	ZDH041P/06B/003-A	ZDH041P/06C/003-A
10	1	30	A	ZDH041P/10B/003-A	ZDH041P/10C/003-A
16	1	30	A	ZDH041P/16B/003-A	ZDH041P/16C/003-A
20	1	30	A	ZDH041P/20B/003-A	ZDH041P/20C/003-A
32	1	30	A	ZDH041P/32B/003-A	ZDH041P/32C/003-A

Field fittable accessories

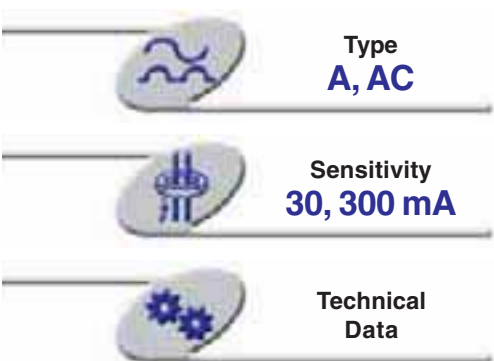

Rated voltage	2 poles	230V / 400V~	
	4 poles	400V / 415V~	
Frequency	50 / 60 Hz		
Calibration temperature	30°C		
Rated making and breaking capacity		Im=Idm	
	In	2p	4p
	16-25-40	500	500
	63	630	630
	80	800	500
	100	1000	630
Sensitivity	30 and 300 mA		
Type	AC and A		
Terminal capacity	25 mm² flexible / 35 mm² rigid		
Electrical endurance	10,000		
Mechanical endurance	20,000		
Standards	EN 61008-1		

- Technical details: page: 41
- Dimensions: page: 85



Nominal current ratings from 16 to 100A

Residual current circuit breakers designed to interrupt the circuit when there is a direct or indirect contact or an earth leakage between live conductors and earth greater than 30 or 300mA. RCCBs must be protected by an MCB or fuse that protects against overloads and short circuits.

Type

Type AC

Protection against sinusoidal leakage current. Applied in domestic and commercial installations.

Type A

Protection against sinusoidal and rectified leakage currents with or without a DC component. Applied in commercial and industrial installations. Type A-S  has a time delayed trip to provide selectivity with downstream earth leakage devices. Applied in commercial and industrial installations.

Poles	In (A)	DIN mod.	Sensitivity mA	Type	Reference
2	25	2	30	A	ZFI25/2/003-A
2	40	2	30	A	ZFI40/2/003-A
2	63	2	30	A	ZFI63/2/003-A
2	80	2	30	A	ZFI80/2/003-A
2	100	2	30	A	ZFI100/2/003-A
2	25	2	300	A	ZFI25/2/03-A
2	40	2	300	A	ZFI40/2/03-A
2	63	2	300	A	ZFI63/2/03-A
2	80	2	300	A	ZFI80/2/03-A
2	100	2	300	A	ZFI100/2/03-A
4	25	4	30	A	ZFI25/4/003-A
4	40	4	30	A	ZFI40/4/003-A
4	63	4	30	A	ZFI63/4/003-A
4	25	4	300	A	ZFI25/4/03-A
4	40	4	300	A	ZFI40/4/03-A
4	63	4	300	A	ZFI63/4/03-A
4	80	4	300	A	ZFI80/4/03-A
4	100	4	300	A	ZFI100/4/03-A
2	40	2	300	A-S	ZFI40/2/03-S
2	63	2	300	A-S	ZFI63/2/03-S
4	40	4	300	A-S	ZFI40/4/03-S
4	63	4	300	A-S	ZFI63/4/03-S
2	16	2	10	AC	ZFI16/2/001-AC
2	25	2	30	AC	ZFI25/2/003-AC
2	40	2	30	AC	ZFI40/2/003-AC
2	63	2	30	AC	ZFI63/2/003-AC
2	80	2	30	AC	ZFI80/2/003-AC
2	100	2	30	AC	ZFI100/2/003-AC
2	25	2	300	AC	ZFI25/2/03-AC
2	40	2	300	AC	ZFI40/2/03-AC
2	63	2	300	AC	ZFI63/2/03-AC
2	80	2	300	AC	ZFI80/2/03-AC
2	100	2	300	AC	ZFI100/2/03-AC
4	25	4	30	AC	ZFI25/4/003-AC
4	40	4	30	AC	ZFI40/4/003-AC
4	63	4	30	AC	ZFI63/4/003-AC
4	25	4	300	AC	ZFI25/4/03-AC
4	40	4	300	AC	ZFI40/4/03-AC
4	63	4	300	AC	ZFI63/4/03-AC
4	80	4	300	AC	ZFI80/4/03-AC
4	100	4	300	AC	ZFI100/4/03-AC



Auxiliar contacts for residual current circuit breakers ZFI.

Right side add-on

CA: Signal changeover contact

CD: Alarm changeover contact

DIN mod.	Description	Reference
1/2	1 CA/CD	AUXZFI1
1/2	1 CA + 1 CA/CD	AUXZFI2



Type
AC



Sensitivity
**10, 30, 100
300, 500mA**



Technical
Data

Rated voltage	2 poles	230V
	4 poles	400V
Frequency	50 / 60 Hz	
Calibration temperature	30°C	
Sensitivity	10, 30, 100, 300 and 500 mA	
Trip time	< 30ms	
Poles	2 and 4	
Type	AC	
Terminal capacity	25 mm ² flexible / 35 mm ² rigid	
Electrical endurance	10,000	
Mechanical endurance	20,000	
Standards	EN 20383-75, CEE27	

- Technical details: page: 41
- Dimensions: page: 83



Nominal current ratings from 25 to 63A

Residual current circuit breakers designed to interrupt the circuit when there is a direct or indirect contact or an earth leakage between live conductors and earth greater than 10, 30, 100, 300 or 500mA. RCCBs must be protected by an MCB or fuse that protects against overloads and short circuits.

Type

Type AC

Protection against sinusoidal leakage current. Applied in domestic and commercial installations.

Residual current circuit breakers are designed to interrupt electrical circuits when earth leakage currents greater than 10,30,100,300 or 500mA are present, thus reducing the hazards associated with direct or indirect electrical contact.

Poles	In (A)	DIN mod.	Sensitivity mA	Type	Reference
2	25	2	10	AC	FI25/2/001
2	40	2	10	AC	FI40/2/001
2	25	2	30	AC	FI25/2/003
2	40	2	30	AC	FI40/2/003
2	63	2	30	AC	FI63/2/003
2	25	2	100	AC	FI25/2/01
2	40	2	100	AC	FI40/2/01
2	63	2	100	AC	FI60/2/01
2	25	2	300	AC	FI25/2/03
2	40	2	300	AC	FI40/2/03
2	63	2	300	AC	FI63/2/03
2	25	2	500	AC	FI25/2/05
2	40	2	500	AC	FI40/2/05
2	63	2	500	AC	FI63/2/05
4	25	4	30	AC	FI25/4/003
4	40	4	30	AC	FI40/4/003
4	63	4	30	AC	FI63/4/003
4	25	4	100	AC	FI25/4/01
4	40	4	100	AC	FI40/4/01
4	63	4	100	AC	FI63/4/01
4	25	4	300	AC	FI25/4/03
4	40	4	300	AC	FI40/4/03
4	63	4	300	AC	FI63/4/03
4	25	4	500	AC	FI25/4/05
4	40	4	500	AC	FI40/4/05
4	63	4	500	AC	FI63/4/05



Application
Industrial and
commercial distribution



**Technical
Data**

Rated voltage		230V / 400V~	
Rated current		6A	
Frequency		50 / 60 Hz	
Calibration temperature		30°C	
Performance			
AC14	Ue	230V	400V
	Ie	8A	5A
AC15	Ue	230V	400V
	Ie	5A	3A
Terminal capacity		2.5 mm²	
Electrical endurance		30,000	
Mechanical endurance		40,000	
Standards		EN 62019	
		EN 60947-5-1	

- **Technical details:** page: 41
- **Dimensions:** page: 86



Add on devices for visual or audible indication of circuit status, or remote control of electrical circuits (MCB/RCD)

YDA alarm or auxiliary contact

Two change over contacts that include both functions described below:

- Auxiliary contact: for monitoring the status of the protective device (open/closed)
- Signal or auxiliary contact: for signalling the automatic tripping of the protective devices (overload or short-circuit for MCB's and earth leakage tripping for RCD's)

The user can easily change the switch application between auxiliary or alarm functions. The device has a test facility allowing the circuit to be checked without actuating the main device. Up to 3 modules can be stacked on the left side of the MCB or RCD (YDA Aux/Alarm, YDU undervoltage release and YDS shunt trip).

DIN mod.	Description	Reference
1	Changeover contact Aux/AI	YDA40



**Technical
Data**

Shunt trip YDS			
Rated voltage	12-48V~	110-415V~	110-125V~
Frequency	50 / 60 Hz		
Calibration temperature	30°C		
Rated voltage	70-110% Ue		
Terminal capacity	2.5 mm ²		
Standards	EN 60947-1		

Undervoltage release YDU			
Rated voltage	24V~/=	48V~/=	230V~
Frequency	50 / 60 Hz		
Calibration temperature	30°C		
Performance			
	Tripping voltage 0.55Ue(+/-10%)		
	Resetting voltage >=0.55 Ue(+/-10%)		
	Tripping time adjustable 0-300 mseg		
Terminal capacity	2.5 mm²		
Standards	EN 60947-1		

- **Technical details:** page: 41
- **Dimensions:** page: 86



YDS shunt trip

YDS shunt trip allowing remote opening of the circuit via a pushbutton or other control device.

YDU undervoltage release

YDU undervoltage release enables the automatic trip of the MCB, RCBO or RCCB if the supply voltage drops below 45~65% of Ue. Time delay function allows a delay of up to 300 msec.

Up to an additional 3 modules can be stacked on the left side of the MCB or RCD (YDA Aux /Alarm, YDU undervoltage release and YDS shunt trip).

DIN mod.	Description	Reference
1	Shunt trip 12-48 Vac/dc	YDS04
1	Shunt trip 110-415 Vac and 110-125 Vdc	YDS40
1	Undervoltage release 24Vac/dc Ajst.0-300msg	YDU02
1	Undervoltage release 48Vac/dc Ajst.0-300msg	YDU04
1	Undervoltage release 230Vac Ajst.0-300msg	YDU23



Application
Industrial and
commercial distribution



Technical
Data

Rated current	5A to 250V~ (AC11)
	0.5A to 220V= (DC11)
Calibration temperature	30°C
Terminal capacity	2.5 mm ²
Electrical endurance	20,000
Mechanical endurance	20,000

- Technical details: page: 41
- Dimensions: page: 87



TH miniature circuit breaker auxiliaries
and accessories

Add on devices for visual or audible indication of circuit status, or remote control of electrical circuit.

AUXTH alarm or auxiliary contact

I/2 module device for monitoring the status of TH breakers (open /closed), or trip condition on overload operation. Can be stacked on the right side of the MCB.

DIN mod.	Description	Reference
1/2	1 CA/CD	AUXTH1
1/2	1 CA + 1CA/CD	AUXTH2

Note: CA: Changeover signal contact
CD: Changeover alarm contact



Technical
Data

Shut trip		
Rated voltage	THSHT60	THSHT415
	24-60V~	24-48V=
	110-415V~	110-125V=
Performance	Rated voltage	Rated current
	110V~	0.3A
	230V~	0.6A
	400V~	1.0A
Terminal capacity	2.5 mm ²	

- Technical details: page: 41
- Dimensions: page: 87



THSHT shunt trip

THSHT shunt trip allowing remote opening of the circuit via a push button or similiar device. Can be stacked on either side of the mcb.

DIN mod.	Description	Reference
1	Shunt trip 110-415 Vac and 110-125 Vdc	THSHT415
1	Shunt trip 24-60 Vac and 24-48 Vdc	THSHT60



CNP spacer 1/2 module

CNP spacers can be fitted on either side of the TemDin 2 device and allow the safe dissipation of heat when several devices are mounted side by side on the same rail.

DIN mod.	Description	Reference
1/2	Spacer	CNCP



Application
Industrial and
commercial distribution



Technical
Data

Standards	DE 0660 part 500 DIN EN 60439-1; 1994
Material busbars	E-CU-F25
Material of insulation	PC/ABS-Blend UL 94-VO
Cross-section of busbars	10, 12, 16 and 20 mm ²
Maximum operating voltage	500 V
Nominal voltage	415 V
Surge voltage	4 kv.
Short-circuit strength	25 kA
Climate stability	DIN 40046 IEC 68-2
Group of insulation	VDE0110, part 1; 4/1997 (IEC 664)
- overvoltage category	III
- degree of soiling	2

• Dimensions: page: 88

Busbar systems



Insulated fork type busbar

Poles	Description	Reference
12	Fork type busbar 1p 210mm s=12mm ²	G1L-210/12
57	Fork type busbar 1p 1000mm s=20mm ²	G1L-1000/20
6x2	Fork type busbar 2p 210mm s=10mm ²	G2L-210/10
28x2	Fork type busbar 2p 1000mm s=16mm ²	G2L-1000/16
4x3	Fork type busbar 3p 210mm s=10mm ²	G3L-210/10
4x3	Fork type busbar 3p 210mm s=16mm ²	G3L-210/16
19x3	Fork type busbar 3p 1000mm s=16mm ²	G3L-1000/16
3x4	Fork type busbar 4p 210mm s=16mm ²	G4L-210/16
14x4	Fork type busbar 4p 1000mm s=16mm ²	G4L-1000/16
27x2	Fork type busbar 3p phase/N 1000mm s=16mm ²	GRST+N-1000/16
	Fork type terminal s=25mm ²	AS/25-GN
1	Protection cover pin/fork (5 units)	CTPH5
	End cap busbar 2p/10	EK-C-2
	End cap busbar 3p/10	EK-C-3
	End cap busbar 2p and 3p/16	EK-C-2+3
	End cap busbar 4p/16	EK-C-4



Insulated pin type busbar

Poles	Descripción	Referencia
12	Pin type busbar 1p 210mm s=10mm ²	S1L-210/10
56	Pin type busbar 1p 1000mm s=16mm ²	S1L-1000/16
6x2	Pin type busbar 2p 210mm s=10mm ²	S2L-210/10
28x2	Pin type busbar 2p 1000mm s=16mm ²	S2L-1000/16
4x3	Pin type busbar 3p 210mm s=10mm ²	S3L-210/10
4x3	Pin type busbar 3p 210mm s=16mm ²	S3L-210/16
19x3	Pin type busbar 3p 1000mm s=16mm ²	S3L-1000/16
3x4	Pin type busbar 4p 210mm s=16mm ²	S4L-210/16
14x4	Pin type busbar 4p 1000mm s=16mm ²	S4L-1000/16
	Pin type terminal s=25mm ²	AS/25-SN
1	Protection cover pin/fork (5 units)	CTPH5
	End cap busbar 2p/10	EK-C-2
	End cap busbar 3p/10	EK-C-3
	End cap busbar 2p and 3p/16	EK-C-2+3
	End cap busbar 4p/16	EK-C-4

Current carrying capacity

		1 pole				2, 3, 4 poles	
Feed-in from the end cross section mm ²		10	12	16	20	10	16
max. current I _s /phase (A)		63	65	80	90	63	80
Feed-in from the middle							
max. current I _s /phase (A)		100	110	130	150	100	130
max. feed-in current I _E /phase		Depends on the cross section for connection					

If you feed-in from the middle you have to observe that the sum of the outgoings is not higher than the max. current of the busbars I_s/phase.



Technical Data

Rated current AC1	25A	32A
Rated voltage	250 V	
Frequency	50 / 60 Hz	
Min/max.ambient T° at		
installation point	-20 / 45 °C	
Terminal capacity	1.5 mm² min. / 10mm² max.	
Coil specifications		
- Command voltage	230V~	
- Supply voltage range %Un	85-110%	
- Consumption AC (VA)		
Coil power loss	4	4.5
Pick up power	4	4.5
- Maximum coil holding voltage time	unlimited	
Standards	EN 60947-4-1	

- Technical details: page: 67
- Dimensions: page: 90



CDR contactors

Used for the remote switching of circuits up to 32A, with double rectified coil, ensuring silent operation whilst increasing electrical endurance. Visual indication of the contactor switch position via front indication. Sealable clamping terminal with captive screw.

Main contact and auxiliary contact blocks can be clipped on to the left-hand side of the contactor without any necessary tooling, in the following combination:

Auxiliary contact block + Main contact block + Contactor

Contactor		Main contact block CDC	Total N° of poles	DIN mod. CDR+CDC	Aux. contact block CDA (max)
1 Pole	2 Poles	2 Poles			
1	-	-	1	1	2
-	1	-	2	1	2
1	-	1	3	2	1
-	1	1	4	2	1

In (A)	DIN mod.	N° contacts	Reference
25 250V~	1	1 NO	CDR103/25
32 250V~	1	1 NO	CDR103/32
25 250V~	1	2 NO	CDR203/25
32 250V~	1	2 NO	CDR203/32



Technical Data

Rated current AC1	25A / 32A
Rated voltage	400 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	1.5 mm ² min. / 10mm ² max.
Standards	EN 60947-4-1



CDC main contact block for CDR

CDC main contact blocks are 2 pole and rated at 16 or 32A. If you fit a CDC block with a CDR or CDO 1pole contactor, you get a 3 poles contactor and if you use a 2 poles CDR or CDO contactor you get a 4 poles contactor. The CDC block is clipped on the left side of the contactor, without need of any screw or additional wiring.

In (A)	DIN mod.	N° contacts	Reference
25 400V~	1	2 NO	CDC2520
32 400V~	1	2 NO	CDC3220



Technical Data

Rated current AC1	5 A
Rated voltage	250 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	6mm ² max.
Standards	EN 60669-2-2



CDA auxiliary contact block

CDA ½ module auxiliary blocks allow additional contacts for signalling and synchronisation with other devices. Auxiliary contact blocks can be fitted to CDR, CDO contactors and ID impulse relays without any necessary tools. A maximum of 2 blocks can be fitted to the contactor depending on the type and number of main contact blocks.

In (A)	DIN mod.	N° contacts	Reference
5 250V~	1/2	1 Changeover	CDA0510
5 250V~	1/2	1NO+1NC	CDA0520



Technical Data

Rated current AC1	25A	32A
Rated voltage	250 V	
Frequency	50 / 60 Hz	
Min/max.ambient T° at		
installation point	-20 / 45°C	
Terminal capacity	1.5 mm² min. / 10mm² max.	
Coil specifications		
- Command voltage	230V~	
- Supply voltage range %Un	85-110%	
- Consumption AC (VA)		
Coil power loss	4	4.5
Pick up power	4	4.5
- Maximum coil holding voltage time	unlimited	
Standards	EN 60947-4-1	

- Technical details: page: 67
- Dimensions: page: 90



CDO contactors

Contactors with a tool-manageable 3-position front handle which allows override, on and off switching of the devices up to 32A:

- STOP - Contacts permanently open
- AUTO - Normal operation
- PERM. - Contacts permanently closed

Double rectified coil ensures silent operation whilst increasing electrical endurance. Visual indication of the contactor switch position via front indicator. Sealable clamping terminal with captive screw. Main contact and auxiliary contact blocks can be clipped on to the left-hand side of the contactor without any necessary tooling, in the following combination:

Auxiliary contact block + Main contact block + Contactor

Contactor		Main contact block CDC	Total N° of poles	DIN mod. CDR+CDC	Aux. contact block CDA (max)
1 Pole	2 Poles	2 Poles			
1	-	-	1	1	2
-	1	-	2	1	2
1	-	1	3	2	1
-	1	1	4	2	1

In (A)	DIN mod.	N° contacts	Reference
25 250V~	1	2 NO	CDO203/25
32 250V~	1	2 NO	CDO203/32



Technical Data

Rated current AC1	25A / 32A
Rated voltage	400 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	1.5 mm² min. / 10mm² max.
Standards	EN 60947-4-1



CDC main contact block for CDO

CDC main contact blocks are 2 pole and rated at 16A or 32A. If you fit a CDC block with a CDR or CDO 1pole contactor, you get a 3 poles contactor and if you use a 2 poles CDR or CDO contactor you get a 4 poles contactor. The CDC block is clipped on the left side of the contactor, without need of any screw or additional wiring.

In (A)	DIN mod.	N° contacts	Reference
25 400V~	1	2 NO	CDC2520
32 400V~	1	2 NO	CDC3220



Technical Data

Rated current AC1	5 A
Rated voltage	250 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	6mm² max.
Standards	EN 60669-2-2



CDA auxiliary contact block

CDA ½ module auxiliary blocks allow additional contacts for signalling and synchronisation with other devices. Auxiliary contact blocks can be fitted to CDR, CDO contactors and ID impulse relays without any necessary tools. A maximum of 2 blocks can be fitted to the contactor depending on the type and number of main contact blocks.

In (A)	DIN mod.	N° contacts	Reference
5 250V~	1/2	1 Changeover	CDA0510
5 250V~	1/2	1NO+1NC	CDA0520



Technical
Data

Rated current AC1	25A	40A	63A
Rated voltage	400 V		
Frequency	50 / 60 Hz		
Min/max.ambient T° at installation point	-20 / 45°C		
Terminal capacity	1.5 mm² min. / 10mm² max.		
Coil specifications			
- Command voltage	220/240 V		
- Supply voltage range %Un	85-110%		
- Consumption AC (VA)			
Coil power loss	4.4-8.4	7	7
Pick up power	14-18	33-35	33-35
- Fuse protection	35 A	63 A	80 A
Standards	EN 60947-4-1		

- Technical details: page: 68
- Dimensions: page: 91

CDI contactors

Used in commercial and industrial applications for loads up to 25A and between 63A, with visual indication of contactor position. Sealable clamping terminals with captive screws.

4 poles contactor	Total N° of poles	DIN mod. CDI+CDI	Block CDI (max)
1	4	2 or 3 + 1/2	1



In (A)	DIN mod.	Contacts	Reference
25 400V~	2	4 NO	CDI406/25
40 400V~	3	4 NO	CDI406/40
63 400V~	3	4 NO	CDI406/63



Technical
Data

Rated current AC1	6 A
Rated voltage	400 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	6mm² max.
Standards	EN 60669-2-2



Auxiliary contact block

CDI ½ module auxiliary blocks allow additional contacts for signalling and synchronisation with other devices. Auxiliary contact blocks can be fitted to CDI contactors without any necessary tools.

In (A)	DIN mod.	Contacts	Referencia
6 400V~	1/2	1NO+1NC	CDI0620



Technical Data

Rated current AC1	16 A / 32 A
Rated voltage	250 V
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Maximum load	16 A 32A
-Incandesc.&hallogen	
(40 to 200W lamps)	3000W 4000W
-Fluorescence, compensated (cosφ=0,9)	
serial	3000VA 4000VA
parallel	2500VA 3200VA
-Fluorescence, non compensated (cosφ=0,5)	
	1800VA 2200VA
Terminal capacity	1.5 mm² min. / 10mm² max.
Coil specifications	
- Command voltage	230V~ / 115V=
- Supply voltage range %Un	90-110%
- Consumption AC (VA)	
Coil power loss	11 11.5
Pick up power	14.5 16.5
- Consumption DC (W)	7.5 8
- Maximum coil holding voltage time	unlimited
Standards	EN 60669-2-2

- Technical details: page: 69
- Dimensions: page: 91

ID impulse relays

Impulse relays are used in the control of electrical circuits for heating, lighting or air conditioning applications by the activating the circuit via a pulsed signal. Front handle allows manual operation and indicates contact position..

Main contact and auxiliary contact blocks can be clipped on to the left-hand side of the contactor without any necessary tooling, in the following combination:

Auxiliary contact block + Main contact block + Impulse relay

Impulse relay ID	IDT Block	Total	DIN mod.	Blocks CDA
1 Pole	2 Poles	N° of poles	ID+IDT	(max)
1	-	1	1	2
-	1	2	1	2
1	-	3	2	1
-	1	4	2	1



In (A)	DIN mod.	Contacts	Reference
16	250V~	1NO	ID103/16
32	250V~	1NO	ID103/32
16	250V~	2 NO	ID203/16
32	250V~	2 NO	ID203/32
16	250V~	1 Changeover	ID303/16



Technical Data

Rated current AC1	16 A / 32 A
Rated voltage	400 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	1.5 mm² min. / 10mm² max.
Standards	EN 60669-2-2



IDT main contact block

Main contact blocks are 2 pole and rated at 16A or 32A. If you fit a IDT block with a ID 1pole impulse relay, you get a 3 poles impulse relay and if you use a 2 poles ID impulse relay you get a 4 poles impulse relay. The IDT block is clipped on the left side of the contactor, without need of any screw or additional wiring.

In (A)	DIN mod.	Contacts	Reference
16	400V~	2 NO	IDT1620
32	400V~	2 NO	IDT3220



Technical Data

Rated current AC1	5 A
Rated voltage	250 V~
Frequency	50 / 60 Hz
Min/max.ambient T° at installation point	-20 / 45°C
Terminal capacity	6 mm² max.
Standards	EN 60669-2-2



CDA auxiliary contact block

CDA ½ module auxiliary blocks allow additional contacts for signalling and synchronisation with other devices. Auxiliary contact blocks can be fitted to CDR, CDO contactors and ID impulse relays without any necessary tools. A maximum of 2 blocks can be fitted to the contactor depending on the type and number of main contact blocks.

In (A)	DIN mod.	Contacts	Reference
5	250V~	1 Changeover	CDA0510
5	250V~	1NO+1NC	CDA0520



Technical Data

Rated current AC12	20 A
Rated voltage	230 V
Frequency	50 / 60 Hz
Terminal capacity	1 mm ² min. / 10mm ² max.
Insulation voltage	250V
Inpulse withstand test voltage	4KV
Standards	EN 60669-1 / EN 60947-5-1

- Technical details: page: 70
- Dimensions: page: 92



PD & PDL pushbuttons

A wide range of pushbuttons and pushbuttons with signalling lamp indication, used for the manual control of electrical circuits. The pushbutton allows the momentary disconnection or connection of the control circuit in use.

PD pushbutton

Description	Contacts	DIN mod	Reference
Pushbutton	1NO	1	PD11A
Pushbutton	1NC	1	PD11B
Pushbutton	2NO	1	PD12A
Pushbutton	1NO/NC	1	PD12C
Double pushbutton	1NO + 1NC	1	PD22C



PDL pushbutton with neon signal lamp

Description	Contacts	DIN mod	Reference
Pushbutton+ Pilot neon green 230V	1NO	1	PDL11AG
Pushbutton+ Pilot neon red 230V	1NO	1	PDL11AR
Pushbutton+ Pilot neon white 230V	1NO	1	PDL11AW
Pushbutton+ Pilot neon green 230V	1NC	1	PDL11BG
Pushbutton+ Pilot neon red 230V	1NC	1	PDL11BR
Pushbutton+ Pilot neon white 230V	1NC	1	PDL11BW



Technical Data

Rated current AC12	20 A
Rated voltage	230 / 400 V
Frequency	50 / 60 Hz
Terminal capacity	1 mm ² min. / 10mm ² max.
Insulation voltage	400V
Inpulse withstand test voltage	4KV
Standards	EN 60669-1

- Technical details: page: 70
- Dimensions: page: 93



WDM switches and changeover switches

Wide range of switches and changeovers with 2 and 3 positions for a manual control of electrical devices. All the devices have 1 DIN mod. dimension.

Description	Contacts	DIN mod	Reference
Switch 1 pole	1NO	1	WDM11A
Switch 2 pole	2NO	1	WDM12A
Switch 3 pole	3NO	1	WDM13A
Switch 4 pole	4NO	1	WDM14A
Changeover 1-2 1 pole		1	WDM21C
Changeover 1-2 2 pole		1	WDM22C
Changeover with zero position 1-0-2 1 pole		1	WDM31C
Changeover with zero position 1-0-2 2 pole		1	WDM32C

Field fittable accessories (*)



Technical Data

Rated voltage	230V / 400V~		
Frequency	50 / 60 Hz		
Insulation voltage	660V~		
	DDF 32A	DDF 63A	DDF 100A
Rated current In	32A	63A	100A
Rated making and breaking capacity	3Ie		
Short-circuit capacity Icm	700A		
Category	AC-22		
Temperature	30°C		
Terminal capacity	35 mm² ≤ 63A		
	50 mm² > 63A		
Mounting	35mm symmetrical DIN rail (EN 50022-DIN 46277)		
Standards	EN 60947-3		

- Accessories: page: 19
- Dimensions: page: 93

(*) Accessories up to 63A



DDF mains disconnect switches

Nominal current ratings from 32 to 100A

Mains disconnect switches allow switching and isolation of main circuits. They must be used in conjunction with a protective device, i.e. a fuse or MCB, enabling protection against overload or short circuit conditions.

Poles	In (A)	DIN mod	Reference
1	32A	1	DDF1010032
1	63A	1	DDF1010063
1	100A	1	DDF1010100
2	32A	2	DDF1020032
2	63A	2	DDF1020063
2	100A	2	DDF1020100
3	32A	3	DDF1030032
3	63A	3	DDF1030063
3	100A	3	DDF1030100
4	32A	4	DDF1040032
4	63A	4	DDF1040063
4	100A	4	DDF1040100



Technical Data

Rated voltage	230 V
Frequency	50 / 60 Hz
Max. Switched current rating	16 (3)A / 250V~
Minimum ON/OFF setting	30 minutes
Consumption	1,5 W
Time accuracy	+/- 5 min/year
Charge reserve	150 h
Temperature range	-10 / 50°C
Ingress protection degree	
- without clamps-cover	IP20
- with clamps-cover	IP30
- panel mounting	IP40
Terminal capacity	1.5 mm ² min. / 2.5mm ² max.

- Technical details: page: 71
- Dimensions: page: 94



RDA24 analogue timer (daily)

Analogue time switches allow the pre-programmed switching of electrical circuits from user defined settings. Programming is made through manual adjustment of the timers slide tappet. Modular casing for din or wall mounted applications using a panel clip. (Supplied separately)
Manual ON/OFF

Description	DIN mod	Reference
Analogue Time switch 24h	2	RDA24
Analogue Time switch 24h reserve time	2	RDA24R
Kit for panel mount		KITPANEL



Technical Data

Rated voltage	230 V
Frequency	50 / 60 Hz
Max. Switched current rating	16 (3)A / 250V~
Minimum ON/OFF setting	15 minutes
Precision	+/- 0.5 sec/day
Quartz frequency	32.768 Hz
Operating temperature	0 / 50°C
Storing temperature	-10 / 50°C
Battery reserve (for date and hour)	15 days
Recharge time to needed save data	72 hours
Protection degree	IP40
Terminal capacity	1mm ² min. / 2.5mm ² max.

- Technical details: page: 71
- Dimensions: page: 94



RDD07 single module digital timer (weekly)

Digital timers allow the pre programmed switching of electric circuits through a weekly time programme. The LCD display shows the present time, in year, month and day, programmed switching interval, relay ON / OFF status and manual operation. Key on relay's front panel is used for manual ON/ OFF.

Description	DIN mod	Reference
Digital weekly time switch 1 circuit	1	RDD07



Technical Data

Rated voltage	230 V
Frequency	50 / 60 Hz
Max. Switched current rating	16 (3)A / 250V~
Change over contact	voltage free
Number of programs	20 On and 20 off
Time intervals programmable	1 sec. - 99 sec.
	1 min. - 59 min.
	1 h - 24 h
	1 day - 7 days
Variable and programs updated	every minute
Channel activation	end of minute
Precision	+/- 0.5 sec./day
Quartz frequency	32.768 Hz
Operating temperature	0 / 50°C
Storing temperature	-10 / 50°C
Battery reserve (for date and hour)	15 days
Minimum recharge time	72 hours
Ingress protection degree	
- without clamps-cover	IP20
- with clamps-cover	IP30
- panel mounting	IP40
Terminal capacity	1.5 mm ² min. / 2.5mm ² max.

- Technical details: page: 71
- Dimensions: page: 94

RDD07A digital time switch

Digital time switch with automatic summer and winter time saving adjustment for set dates. Digital timers allow the pre programmed switching of 1 or 2 electric circuits through a weekly time programme. LCD display shows current program status, current date and time. Modular casing for Din or wall mounted applications using a panel clip. (Supplied separately)



Description	DIN mod.	Reference
Digital weekly time switch auto 1 circuit	2	RDD07A
Digital weekly time switch auto 2 circuits	2	RDD07A2
Kit for panel mount		KITPANEL



Technical Data

Rated voltage	230 V
Frequency	50 / 60 Hz
Max. Switched current rating	16 (3)A / 250V~
Maximum pilotable power	
- tungsten lamp (18x60w)	2000w/230Vac /cosφ=1
- fluorescent lamp	720w/230Vac /cosφ=0,8
- DUO type lamp	200w/230Vac /cosφ=0,9
Activation threshold	2 ~ 100 lux
	2 ~ 1000 lux
	2 ~ 10000 lux
Delay time	
- switching ON	8 seconds +/- 10%
- switching OFF	38 seconds +/- 10%
Operating temperature limit of the module	0 / +55 °C
Operating temperature limit of the photocell	-30/+65°C
Storing temperature of the module	-10/+65°C
Storing temperature of the photocell	-40 / +75 °C
Terminal capacity	1 mm ² min. / 2.5mm ² max.

- Technical details: page: 72
- Dimensions: page: 95

RDA24P light sensitive switch

Light sensitive switches allow the control of electric circuits by measuring ambient light intensity. Detected via a separate photocell, the switch changes state when the light intensity drops below a preset level. Connected to the switch through a 4 ~9mm diameter wire, the photocell is suitable for IP65 application.

The switch has an ON/OFF time delay avoiding nuisance operation via unstable light sources such as headlights or lightning flashes. Modular casing for Din or wall mounted applications using a panel clip. (Supplied separately)



Description	DIN mod.	Reference
Light sensitive switch	2	RDA24P
Photocell (spare unit)		RDAP
Kit for panel mount		KITPANEL



Technical Data

	SDS016A	SDS016B
Rated voltage	230V~	220/230V
Frequency	50/60Hz	
Max. Switched current rating	16A	
Contact type	NO (not potential-free)	NO
Time lag adjustable	20seg~10min	30seg~15min
Nº máximo de pulsadores luminosos	50mA	
Switching capacity		
- incandescents lamps	2300 w	3500 w
- fluorescence serial compensated		3500 VA
- fluorescence parallel compensated	1300 w	2500 VA
- resistive load cosφ=1	4000 w	
Terminal capacity	4 mm ²	10 mm ²

- Technical details: page: 72
- Dimensions: page: 95



SDS staircase switches

Staircase switches allow the timed management of lighting or ventilation circuits used in stairwells or hallways.

SDS016A has permanent time function, or preset timed illumination function. 5 different wiring arrangements are possible: time reset, without time reset, simultaneous operation, consecutive operation and timing off delay.

SDS016B with 3 position handle for automatic, stop and permanent duty. The switching function is contactor enabled and offers silent operation, high switching capacity and good endurance values for incandescent or fluorescent loads. Suitable for 3 or 4 wire systems.

In (A)	DIN mod.	Reference
16A 230V	1	SDS016A
16A 230V	1	SDS016B



Technical Data

Rated current AC12	20 A
Rated voltage	230 V
Frequency	50 / 60 Hz
Lamp	Neon 230V
Lamp power	0.6w
Insulation voltage	250V
Rated impulse voltage	4KV
Terminal capacity	1 mm ² min. / 10mm ² max.
Standards	EN 60947-5-1

- Dimensions: page: 96



LD pilots

Used to signal the status of the electric circuits: motors, fan, pump, heater, etc. Available with different coloured lenses.

Description	Reference
Pilot green neon 230V	LD1G
Pilot red neon 230V	LD1R
Pilot white neon 230V	LD1W
Pilot double red&green neon 230V	LD2C



Technical Data

Primary voltage	230V~
Secondary voltage	12V~
Frequency	50 / 60 Hz
Terminal capacity	4 mm ²
Mounting	Rail DIN simetric 35mm
Standards	EN 60742

- Dimensions: page: 96



TDB bell + buzzer + transformer

TBD Bell/buzzer is used for audible signalling in domestic and commercial installations

The device has a double insulated envelope by construction and complies with EN 60 742, which can be used be classified as 'transformers for bells'. This means it is conceived to power bells or similar intermittent warning devices.

Primary voltage	DIN mod.	Reference
230 V~	1	TDB23R



Technical Data

	Ammeter/Voltmeter	Frequency meter	Wattmeter
Rated voltage	230 V~		
Frequency	50 / 60 Hz		
Description	3 digits red display LED 7 segments - h= 9mm		
Precision @ 25°C (%)	+/-0.5% f.s.d. +/- 1 digit	+/-0.2% f.s.d. +/- 1 digit	2% f.s.d. +/- 2 digit Cosφ≤0,7
Input			
- Current	TI/5A a.c.	—	TI/5A a.c.
- Voltage	<500 Vac	10–500Vac	<500 Vac
Overload	1.2 In/Vn		
Position of the decimal point	minidip switch	automatic	minidip switch
Primary capacity	minidip switch	—	minidip switch
Power consumption	4 VA		
Operating temperature	0 / 50°C (R.H.<90% no condensation)		
Storing temperature	-10/ 60°C (R.H.<90% no condensation)		
Terminal capacity	1.5 mm² min./ 4mm² max.		
Standards	EN 61010-1, EN 50081-1, EN 50082-1		

- Technical details: page: 73
- Dimensions: page: 97



Technical Data

Rated voltage	230 V~
Frequency	50 / 60 Hz
Description	LCD display backlight green colour - h= 13mm 3 digit display for instant measurement 6 digit display for energy measurements
Resolution	10 bits
Visual variable	once a time
Precision @ 25°C (%)	1% f.s.d. Cosφ=1
Input	
- Current	5A a.c. (48–62 Hz)
- Voltage	230 Vac (L-N) / 400 Vac (L-L)
Output	
- Type	Open collector transistor
- Von (max.)	0.6 Vdc/ Ic=4mA (max)
- Voff (max.)	26 Vdc
- Number of pulses	settable pulses for 1 Kwh/1kVAh
- Duration pulse	Ton=20 ms (+/- 1ms) Toff=19 ms (min)
Indications	min.0 / max.999 (for instant measurements) min.00000.0 / max.99999.9 (for energy measurements)
Overload	1.2 In/Vn
Power consumption	5 VA
Operating temperature	0 / 50°C (R.H.<90% no condensation)
Storing temperature	-10/ 60°C (R.H.<90% no condensation)
Standards	EN 61010-1, EN 50081-1, EN 50082-1

- Technical details: page: 74
- Dimensions: page: 97

MDD digital measurement instruments

A wide range of measurement equipment allowing the measurement of electrical parameters including: voltage, current, active power, reactive power, energy and power factor. Voltmeters and Ammeters within the range are available in either digital or analogue versions. Universal digital analysers allow the measurement of a wide range of electrical parameters within one device. Units have modular casing for Din or wall mounted applications using a panel clip. (Supplied separately)

Digital ammeter/ voltmeter

One device suitable for voltage or current measurement. Double input selection on the unit allows connections to determine usage as either a voltmeter or ammeter.

Digital frequency meter

This device allows the monitoring of frequencies from 1 to 999Hz and is equipped with automatic load selection.

Digital wattmeter

Measurement of active power circuits in single or three phase systems, with balanced / non-balanced load characteristics. Primary load selection by front dip switch, automatic decimal point selection.

Description	DIN mod.	Reference
Digital Ammeter/Voltmeter	2	MDD06B
Digital Frequency meter	2	MDD00F
Digital Wattmeter	2	MDD06W
Kit for panel mount		KITPANEL

Universal digital analyser

One simple device for monitoring electrical parameters in single phase or three phase systems with balanced / non-balanced load characteristics, 5 module width.

Three key enquiry system measuring 24 system parameters: current, voltage, active power, reactive power, power factor, active and reactive energy.

Description	DIN mod.	Reference
Universal digital analyser	5	MDD06P





Technical Data

	Ammeter	Voltmeter
Rated voltage	—	300 and 500 Vac
Rated current	15, 25 and 40A direct 50 to 1000A / CT	—
Frequency	15~100 Hz	—
Precision @ 25°C (%)	1.5 f.s.d.	—
Overload		
- Permanent	1.5 Ie	1.2 Ve
- 5 seconds	10 Ie	2 Ve
Consumption	0.3~1 VA	1.5~3 VA
Operating temperature	-25 / 40°C	
Testing voltage	2000V 50Hz during 1 minute	
Standards	IEC-51, VDE-0410, DIN 43780, EN-21318, BS-89, EN 50081, EN 50082, CEI 1010, EN 61010	

- Technical details: page: 75
- Dimensions: page: 98



Technical Data

Rated voltage	230 V~
Frequency	50 / 60 Hz
Description	Display mechanical 5+1 digit - h=4mm
Precision @ 25°C (%)	2% f.s.d. +/- 2 digit Cosφ≤0,7
Input	
- Current	16A a.c. (48~62 Hz)
- Voltage	230 Vac (+10/-15%) by voltimetric input
Overload	1.2 In/Vn
Consumption	6 VA 1.5w (capacitive)
Operating temperature	0 / 50°C (R.H.<90% no condensation)
Storing temperature	-10/ 60°C (R.H.<90% no condensation)
Terminal capacity	1.5 mm² min / 4mm² max
Standards	EN 61010-1, EN 50081-1, EN 50082-1

- Technical details: page: 75
- Dimensions: page: 98

MDA analogue ammeters and voltmeters

Current and voltage measurement for a.c. circuits. Easy scale change for different transformer ratios.

Description	DIN mod.	Reference
Analogue voltmeter 300V	3	MDA03V
Analogue voltmeter 500V	3	MDA05V
Analogue Ammeter 15A	3	MDA01A
Analogue Ammeter 25A	3	MDA02A
Analogue Ammeter 40A	3	MDA04A
Analogue Ammeter X/5 A	3	MDA06A

MDA06A interchangeable scales for analogue meters

Description	Reference
Scale 50 A	MDC050A
Scale 75 A	MDC075A
Scale 100 A	MDC100A
Scale 150 A	MDC150A
Scale 200 A	MDC200A
Scale 250 A	MDC250A
Scale 300 A	MDC300A
Scale 400 A	MDC400A
Scale 500 A	MDC500A
Scale 600 A	MDC600A
Scale 800 A	MDC800A
Scale 1000 A	MDC1000A

Active energy meter

Single phase energy meter with 6-digit display and 0.1k w resolution. Green LED indication for power input and flashing red LED for load consumption (640 imp/kwh). Units have modular casing for Din or wall mounted applications using a panel clip. (Supplied separately).



Description	DIN mod.	Reference
Active Energy meter	2	MDA00E
Kit for panel mount		KITPANEL



Technical Data

Rated voltage	720V max.
Primary rated current	from 50 to 1000A
Secondary rated current	5A
Frequency	50 / 60 Hz
Test voltage	3 kV (1min/50Hz)
Rated short-time thermal current	I _{th} : limited to primary bar
Rated dynamic current	I _{din} = 2.5 I _{th}
Continuous overload	1.2 I _n
Standards	IEC 185 ; UNE21088-1; VDE0414; IEC801/1-3,4

• Dimensions: page: 99



TDC current transformer

Current transformers allow measurement of high line currents of up to 1000A with 5A secondary output ratios for use with low input range meters.

The CT are cable/bus-bar type. The self-extinguish plastic case offers excellent resistance to mechanical and thermal stress. Every CT enclose a fastening system to rail DIN as standard.

Description			Reference
I _{prim} =50A	bus-bar: 20x5mm cable: ø 16mm	Class 3 - 1VA	TDC050
I _{prim} =75A		Class 1 - 1VA Class 3 - 2VA	TDC075
I _{prim} =100A		Class 1 - 2.5VA Class 3 - 3.75VA	TDC100
I _{prim} =150A	bus-bar:30x10mm cable:ø 22mm	Class 0.5 - 1.5VA Class 1 - 2.5VA Class 1 - 2.5VA	TDC150
I _{prim} =200A		Class 0.5 - 2.5VA Class 1 - 3.75VA Class 1 - 5VA	TDC200
I _{prim} =250A	bus-bar:40x10mm cable:ø 30mm	Class 0.5 - 5VA Class 1 - 7.5VA Class 1 - 10VA	TDC250
I _{prim} =300A		Class 0.5 - 7.5VA Class 1 - 10VA Class 1 - 15VA	TDC300
I _{prim} =400A		Class 0.5 - 10VA Class 1 - 15VA Class 1 - 20VA	TDC400
I _{prim} =500A		Class 0.5 - 15VA Class 1 - 20VA Class 1 - 30VA	TDC500
I _{prim} =600A	bus-bar:60x10mm cable:ø 51mm	Class 0.5 - 15VA Class 1 - 20VA Class 1 - 30VA	TDC600
I _{prim} =800A		Class 0.5 - 15VA Class 1 - 20VA Class 1 - 30VA	TDC800
I _{prim} =1000A	bus-bar:80x10mm cable:ø 65mm	Class 0.5 - 15VA Class 1 - 20VA Class 1 - 30VA	TDC000
Fastening system to rail DIN			TDCKIT



Technical
Data

Primary voltage	230V~
Frequency	50 / 60 Hz
Terminal capacity	4 mm²
Standards	EN 60742

• Dimensions: page: 101















TDS safety transformer

Safety transformers are used for the distribution of very low voltages: this guarantees high protection against electrocution.
Short-circuit proof and failsafe transformers offer great reliability in terms of their galvanic separation between primary and secondary circuits.
Short-circuit proof transformers are protected from the over temperatures consequent in overload and short circuit conditions, by their own incorporated protective device. When normal operating conditions are returned and the transformer temperature is returned to within operating limits, the transformer will function correctly.
Failsafe transformers on the other hand can no longer function, following anomalous use or fault.

Primary voltage	Secondary voltage	Nominal power	DIN mod.	Reference
230V~	12V~	10 VA	2	TDS010F
230V~	12V~	15 VA	2	TDS015F
230V~	12/24V~	10 VA	2	TDS010R
230V~	12/24V~	15 VA	2	TDS015R
230V~	12/24V~	30 VA	4	TDS030R
230V~	12/24V~	40 VA	4	TDS040R

 = F Failure-proof

 = R Short circuit proof

TDS010R	TDS015R	TDS030R	TDS040R
			
			
			



Technical Data

Rated voltage	690V
Impulse withstand voltage	6 kV
Thermal overload release	In from 0.1 to 25A setting range
Magnetic release	setting at 12 x In
Frequency	50 / 60 Hz
Electric and mechanical	
endurance	100.000 cycles
Maximum switch	30 manoeuvre/hour
Impact resistance	20g (impact duration of 20ms)
Operating temperature	
- open	-25°C / 55°C
- enclosed	-25°C / 40°C
Terminal capacity	0.75 mm ² / 4 mm ²
Torque main contacts	1.2 Nm
Weight approx.	250 g
Standards	IEC 947, EN 60947
	EN 60204, VDE 0113, VDE 0660

- Technical details: page: 76
- Dimensions: page: 101

GD25 manual motor starter

Manual motor starters are designed for the operation and protection of small electrical motors (start /stop procedure and overload protection for single or three phase applications).



Rated current	Setting ranges of thermal overload release	Reference
0.16A	0.1-0.16A	GD25016
0.25A	0.16-0.25A	GD25025
0.4A	0.25-0.4A	GD2504
0.63A	0.4-0.63A	GD25063
1A	0.63-1A	GD251
1.6A	1-1.6A	GD251V6
2.5A	1.6-2.5A	GD252V5
4A	2.5-4A	GD254
6.3A	4-6.3A	GD256V3
10A	6.3-10A	GD2510
16A	10-16A	GD2516
20A	16-20A	GD2520
25A	20-25A	GD2525

Manual motor starter accessories

Accessories for the visual or audible indication of circuit status, or remote control of electrical circuits.

Auxiliary contact blocks

For remote monitoring of the manual motor starters status.



Technical Data

Rated voltage	500V
Current Ith	6A
Rated current AC15	
	230V 400V 500V
	3.5 A 2 A 1.5 A
Frequency	50 / 60 Hz
Electric endurance AC3	100,000 cycles
Maximum switch	30 manoeuvre/hour
Impact resistance	20g (impact duration of 20ms)
Terminal capacity	0.75 mm ² / 2.5 mm ²
Torque auxiliary contacts	1 Nm
Weight approx.	35g



DIN mod.	Contact	Reference
1/2	1NO+1NC	GDPS11
1/2	2NO	GDPS20
1/2	1NO	GDPS10
1/2	1NC	GDPS01

GD shunt trip and undervoltage release

Shunt trips allow the remote tripping of the manual motor starters on applied voltage. Under voltage releases allows the remote tripping of the circuit when coil voltage is removed, or when the system voltage drops below a pre-determined level.



Technical
Data

	GDUVT	GDSHT
Rated voltage	24, 110, 230 and 400 V~	
Frequency	50 / 60 Hz	
Trip range	0.35~0.7 Ue	—
Operation range	0.85~1.1 Ue	0.7~1.1 Ue
Weight approx.	65g	



Nominal power	Description	Reference
50-60 Hz	Undervoltage release	GDUVT
50-60 Hz	Shunt trip	GDSHT

(1) Nominal voltage and frequency must be indicated.



Enclosures

Range of flush mount or surface mount enclosures for the installation of GD manual motor starters. Auxiliary contacts can be fitted on the manual motor starter.

Description	Ingress protection degree	Reference
Surface mounting	IP-41	GDO41
Surface mounting	IP-55	GDO55
Flush mounting	IP-41	GDCP44
Flush mounting	IP-55	GDCP55

Other accessories

Enclosure padlocking facility allows up to 3 padlocks to be fitted, for lock in off facility. Emergency stop button, 35 mm diameter with IP55 protection. Unlocked by turning movement.



Description	Reference
Enclosure padlocking facility	GDZ
Emergency stop button	GDNAT



Technical Data

	FDS08/FDI08	FDS10/FDI10	FDS14	FDS22
Utilization category	AC-22B			AC-21B
Rated voltage	400V	690V		
Rated impulse withstand voltage Uimp	8kV			
Rated current	20A	25A	50A	100A
Rated making breaking capacity	60A	75A	150A	150A
Rated short time withstand current Icw	240A	300A	600A	1200A
Rated conditional short circuit current	50kA	100kA	100kA	100kA
Frequency	50 Hz			
Maximum power dissipation	2.6w	3w	5w	9.5w
Terminal capacity	25mm² max.		35mm² max.	50mm² max.
Fuse size	8x31	10x38	14x51	22x58
Standards	IEC 947-1, IEC 947-3			

• Dimensions: page: 103



FD fuse holder

Fuses guarantee a high level of protection against overload and short circuit conditions, in control, signalling and installation networks. FD fuseholders are suitable for gL, gG and aM type fuses.

Poles	In (A)	Voltage (V)	DIN mod.	Indicator	Reference
1P	20A	400V~	1	-	FDS0810
1P+N	20A	400V~	2	-	FDS0811
2P	20A	400V~	2	-	FDS0820
3P	20A	400V~	3	-	FDS0830
3P+N	20A	400V~	4	-	FDS0831
1P	20A	400V~	1	LED	FDI0810
1P+N	20A	400V~	2	LED	FDI0811
2P	20A	400V~	2	LED	FDI0820
3P	20A	400V~	3	LED	FDI0830
3P+N	20A	400V~	4	LED	FDI0831
1P	25A	690V~	1	-	FDS1010
1P+N	25A	690V~	2	-	FDS1011
2P	25A	690V~	2	-	FDS1020
3P	25A	690V~	3	-	FDS1030
3P+N	25A	690V~	4	-	FDS1031
1P	25A	690V~	1	LED	FDI1010
1P+N	25A	690V~	2	LED	FDI1011
2P	25A	690V~	2	LED	FDI1020
3P	25A	690V~	3	LED	FDI1030
3P+N	25A	690V~	4	LED	FDI1031
1P	50A	690V~	1.5	-	FDS1410
1P+N	50A	690V~	3	-	FDS1411
2P	50A	690V~	3	-	FDS1420
3P	50A	690V~	4.5	-	FDS1430
3P+N	50A	690V~	6	-	FDS1431
1P	100A	690V~	2	-	FDS2210
1P+N	100A	690V~	4	-	FSD2211
2P	100A	690V~	4	-	FDS2220
3P	100A	690V~	6	-	FDS2230
3P+N	100A	690V~	8	-	FDS2231



Technical Data

	TM20I	TM20IS	TM20II	TM20IIII
Rated voltage (V~)		230V		400/230V
Maximum voltage (V~)		270		540/270V
Frequency		50/60 Hz		
I _{max} (8/20μs)		20kA		
Protection level V _p ⁽¹⁾		960V		
Poles	1	1	2	4
Type	Single pole plug-in		Multi-pole monoblock	
Thermal fuse healthy indication	LED	LED + S ⁽²⁾	LED	LED
Operating temperature	-30°C / 70°C			
Connection	In parallel			
Response time	5ns			
Terminal capacity	50mm ²			
Replacement module	TM20IR	TM20IR	—	—

Note:

(1) V_p: Residual voltage value when a transient current (8/20μs) is equal to the rated current.

(2) References with «S» indicated that have double indication: LED + dry contact (remote signal).

• Technical details: page: 77

• Dimensions: page: 104



Poles	Rated voltage	I _{max} (8/20μs)	DIN mod.	Type	Reference
1	230V	20kA	1	plug-in	TM20I
1	230V	20kA	1	plug-in	TM20IS
	Replacement module				TM20IR
2	230V	20kA	2	monoblock	TM20II
4	400/230V	20kA	5	monoblock	TM20IIII



Technical Data

	TM45I	TM45IS	TM45II	TM45IIII
Rated voltage (V~)		230V		400/230V
Maximum voltage (V~)		270		540/270V
Frequency		50/60 Hz		
I _{max} (8/20μs)		45kA		
Protection level V _p ⁽¹⁾		1000V		
Poles	1	1	2	4
Type	Single pole plug-in		Multi-pole monoblock	
Thermal fuse healthy indication	LED	LED + S ⁽²⁾	LED	LED + S ⁽²⁾
Operating temperature	-30°C / 70°C			
Connection	In parallel			
Response time	5ns			
Terminal capacity	50mm ²			
Replacement module	TM45IR	TM45IR	—	—


Note:

(1) V_p: Residual voltage value when a transient current (8/20μs) is equal to the rated current.

(2) References with «S» indicated that have double indication: LED + dry contact (remote signal).

• Technical details: page: 77

• Dimensions: page: 104



Poles	Rated voltage	I _{max} (8/20μs)	DIN mod.	Type	Reference
1	230V	45kA	1	plug-in	TM45I
1	230V	45kA	1	plug-in	TM45IS
	Replacement module				TM45IR
2	230V	45kA	2	monoblock	TM45II
4	400/230V	45kA	5	monoblock	TM45IIII



Technical Data

	TM65I	TM65IS	TM80IIIS	TM35SPI ⁽³⁾
Rated voltage (V~)	230V		400/230V	230V
Maximum voltage (V~)	270V		540/270V	255V
Frequency	50/60 Hz			
I _{max} (8/20μs)	65kA		80kA	35kA(10/350)
Protection level V _p ⁽¹⁾	1200V			<4kV
Poles	1	1	4	1
Type	Single pole plug-in		Multi-pole monoblock	spark-gap
Thermal fuse healthy indication	LED	LED + S ⁽²⁾	LED + S ⁽²⁾	—
Operating temperature	-30°C / 70°C			
Connection	In parallel			
Response time	5ns			
Terminal capacity	50mm ²			
Replacement module	TM65IR	—	—	—

Note:

- (1) V_p: Residual voltage value when a transient current (8/20μs) is equal to the rated current.
 (2) References with «S» indicated that have double indication: LED + dry contact (remote signal).
 (3) Spark gap type: follow current=1,5kA, Insulation resistance ≥ 1000MΩ.

• Technical details: page: 77

• Dimensions: page: 104



Poles	Rated voltage	I _{max} (8/20μs)	DIN mod.	Type	Reference
1	230V	65kA	1	plug-in	TM65I
1	230V	65kA	1	plug-in	TM65IS
	Replacement module				
4	400/230V	80kA	5	monoblock	TM80IIIS
1	230V	35kA(10/350)	1	spark gap	TM35SPI

Telecommunication line protection

Protect telecommunications installations against overvoltage surge.



Technical Data

	TMT10RJ45	TMT101DIN	TMT102DIN	TMT104DIN	TMTV10
Rated voltage (V~)		150V=			5V=
Peak transient current (8/20μs)			10kA		
Connection	Serial (up 400mA)				Serial (up 500mA)
Response time			5ns		

• Technical details: page: 77

• Dimensions: page: 105



N° lines	Rated voltage	Connection	Fixing type	Reference
1	150V=	Serial (up 400mA)	screws	TMT10RJ45
1	150V=	Serial (up 400mA)	DIN	TMT101DIN
1	150V=	Serial (up 400mA)	DIN	TMT102DIN
1	150V=	Serial (up 400mA)	DIN	TMT104DIN
1	5V=	Serial (up 500mA)	—	TMTV10